



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

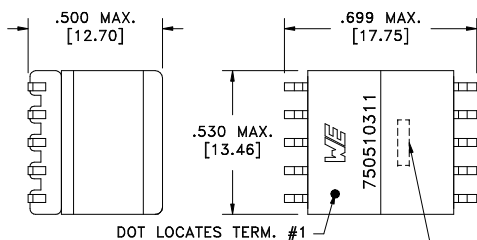


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE



AREA REPRESENTS TERMINAL PAD DIMENSIONS

.034(10) [.86]


.046 REF.(10) [1.17]

.098(8) [2.48]

REFERENCE LAND SIZE

.074 REF.(10) [1.88]

CUSTOMER TO DETERMINE LAND LAYOUT



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 tie(2+3), @20°C	2.00 ohms max.
D.C. RESISTANCE	10-7 tie(8+9), @20°C	2.00 ohms max.
INDUCTANCE	1-4 tie(2+3), 10kHz, 100mVAC, Ls	1.40mH ±10%
LEAKAGE INDUCTANCE	1-4 tie(2+3, 7+8+9+10), 1MHz, 100mVAC, Ls	1.1uH max.
INTERWINDING CAPACITANCE	1-10 tie(1+2+3+4, 7+8+9+10), 100kHz, 100mVAC, Cs	120pF max.
DIELECTRIC	1-10 tie(2+3, 8+9), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-4):(10-7), tie(2+3, 8+9)	2:1, ±1%
TOTAL HARMONIC DISTORTION	25kHz, 1.41Vrms across PRI, 25 ohm load, 100 ohm input, tie(2+3, 8+9)	-90dB typ., -83dB max.
TOTAL HARMONIC DISTORTION	25kHz, 3.89Vrms across PRI, 25 ohm load, 100 ohm input, tie(2+3, 8+9)	-85dB typ., -78dB max.
LONGITUDINAL BALANCE ¹	12MHz	41dB min.

¹Per LCL (ITU 993.2 +3dB).

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:
- Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0499 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750510311
6A	9/11	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750510311	SPECIFICATION SHEET 1 OF 1